


## 11-7

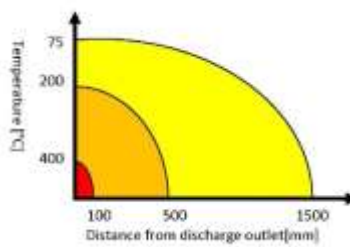

Technical specifications		
Model	DSPA 11-7	
Type of discharge outlet	Axial	
Diameter	165 mm	
Height	72 mm	
Total weight	2.10 ±0.2kg	
Aerosol mass	0.52kg	
Discharge time	30-50 sec	
Activation	Built-in	
Temperature range	From -40°C to +75°C	
Relative humidity	Up to 95% at 54°C	
Mechanical effect	Tested attached to machinery with frequency range 50 Hz to 150 Hz:30 m/s <sup>2</sup> (= 3,0 g)	
Min. distance for persons(75°C) from discharge outlet		
Min. distance for combustible material(200°C) from discharge outlet		
Min. distance for construction Structures(400°C) from discharge outlet		
Maximum temperature of body	≤ 150°C	
Heat quantity(KJ)	3091	
Tested mounting positions	Side/Center	
Minimum height	1.22 m	
Maximum coverage	7.32 x 1.22 m	
Maximum height	3.05 m	
Maximum coverage	1.83 x 1.83 m	
Corrosion test	Moist H <sub>2</sub> S air mixture	Pass
	Moist CO <sub>2</sub> /SO <sub>2</sub> air mixture	Pass
	Salt spray	Pass
	Moist NH <sub>3</sub> /air mixture	Pass
Application	Recommended for the protection of semi large compartments such as storage rooms, archives, technical rooms and server rooms	
Shelf life generators	15 years	
Storage conditions	In closed storage rooms at 5°C to 40°C and relative humidity up to 80% without the presence of aggressive environment	

**More information:**

DSPA.nl  
 Hulzenseweg 10-20  
 6534 AN Nijmegen  
 The Netherlands  
 T. +31 (0) 24 35 22 573  
 E info@dspa.nl